

98 03 / 59



INVESTOR IN PEOPLE

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

PCT/GB 2003 / 0 0 0 0 5 9

REC'D 07 MAR 2003

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed *AmBrewster*

Dated 24 January 2003

BEST AVAILABLE COPY

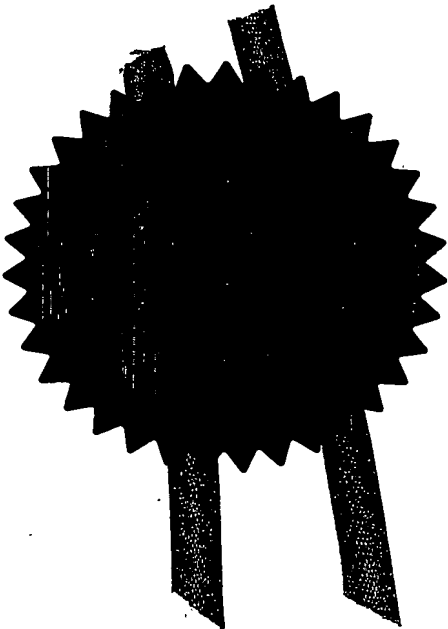


The **BEST AVAILABLE COPY**
Patent Office

1/77

Request for grant of a patent

See the notes on the back of this form. You can also get explanatory leaflet from the Patent Office to help you fill in this form)

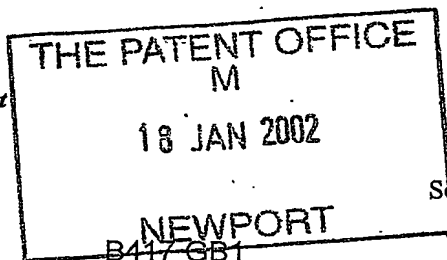

18JAN02 E688976-1 D01554
Patent Office 113.8

Cardiff Road
Newport
South Wales NP10 8QQ

Your reference

Patent application number
(The Patent Office will fill in this part)

0201113.8

18 JAN 2002

Full name, address and postcode of the or of each applicant (underline all surnames)

Tyco Electronics Raychem N.V.
Diestsesteenweg 692
B-3010 Kessel-Lo
Belgium

830621900.1

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

Belgium

Title of the invention "ENCLOSED OPTICAL CIRCUITS"

Name of your agent (if you have one)
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Gerhard Romano BEITSMA
TYCO ELECTRONICS UK LTD.
European Patent Department
Faraday Road, Dorcan, Swindon
Wiltshire, SN3 5HH,
United Kingdom.

Patents ADP number (if you know it)

7993520002

If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

If this application is divided or otherwise derived from an earlier UK application give the number and the filing date of the earlier application

Priority application number
(if you know it)

Date of filing
(day / month / year)

Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer YES)

Yes' if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

Enter the number of sheets for any of the following items you are filing with this form.

Do not count copies of the same document.

Continuation sheets of this form

Description

4 ✓

Claims(s)

2 ✓

Abstract

1 ✓

Drawing(s)

2 + 2 ✓

BEST AVAILABLE COPY

0. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

YES ✓


Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

FEE SHEET ✓

1. I/We request the grant of a patent on the basis of this application.

Signature

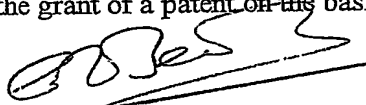

Date 17 January 2002

2. Name and daytime telephone number of person to contact in the United Kingdom

Romano Beitsma

01793 572511

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

BEST AVAILABLE COPY

DUPLICATE

- 1 -

ENCLOSED OPTICAL CIRCUITS

The present invention relates to enclosed optical circuits. More in particular, the present invention relates to a device and a method for sealingly enclosing at least one optical circuit.

5 It is well known that moisture has adverse effects on the properties of optical components. The split ratio of optical splitters, for example, may be influenced by the presence of moisture, and in filters and mirrors moisture may cause degrading of their optical characteristics. The sealing of optical components against moisture and other environmental influences, in other words environmental sealing, is therefore highly
10 desirable.

It has been proposed to environmentally seal individual optical components. This is, however, relatively expensive and not always effective.

15 In the case of electrical or electronic components it is known to seal an entire circuit by enclosing it in a flexible, moisture-resistant bag. WO 94/18815 (Ericsson), for example, discloses a casing for flexibly enclosing electronic circuitry. The casing comprises a laminate consisting of metal and plastic sheets. Two sheets of laminate are joined to form an envelope in which electronic circuitry may be accommodated.
20 Electrical conductors pass through the joint region of the laminate.

Although such an arrangement may be effective for sealing electronic circuits, it is less suitable for optical components or circuits. The present inventors have found that the performance of optical components and/or circuits can be significantly improved by
25 providing a controlled environment, that is, an environment in which both the humidity and the temperature are controlled. Conversely, the failure rate of optical components and/or circuits can be significantly reduced by a suitably controlled environment.

It is known for a flexible container to contain a desiccant to control the moisture
30 level within the container. The present invention seeks to improve the environment of

optical circuits by providing a device for sealingly enclosing at least one optical circuit, the device comprising a container and a humidity control means accommodated in the container, characterised by temperature control means arranged in the container.

- 5 By providing temperature control means in addition to humidity control means (such as desiccant) a further reduction of the possibility of condensation within the device can be achieved, while in addition excessively high temperatures can be avoided.

10 The container is preferably substantially flexible but may also be substantially rigid, or some parts may be flexible while others are rigid.

The temperature control means may comprise a heat sink or a heat pipe, and/or an active temperature controller such as a heater (e.g. electrical) and/or an active cooling element. It will be understood that the container provides a moisture barrier and may be
15 hermetically sealed. Preferably, the container provides a thermal barrier as well.

In first embodiment of the device according to the present invention, the temperature control means are accommodated in a wall of the container. To this end a cavity may be provided in the wall to accommodate the temperature control means.
20

In a second embodiment, the temperature control means are accommodated in a space defined by the container. That is, the temperature control means are located in the space where the optical circuit(s) is (are) located, preferably adjacent the optical circuit(s). Advantageously, the temperature control means are accommodated between the at least
25 one optical component and a desiccant means.

In a third embodiment, at least two temperature control means are provided, one being located in a wall of the container and another in the space defined by the container. In this way, an even higher degree of temperature control can be achieved.
30

In a preferred embodiment the container comprises an insulating layer and a

moisture barrier layer. The moisture barrier layer is preferably located on the inside of the container.

In a particularly advantageous embodiment the device has an opening for feeding optical fibres therethrough, said opening being sealed by sealing strips to which heat and/or pressure is applied, said sealing strips preferably being made of plastic. Such a sealing arrangement is described in British Patent Application GB 0110366.2 [B408].

The present invention further provides a kit-of-parts for forming a device as defined above, and a method of sealingly enclosing at least one optical circuit, the method comprising the steps of providing a container, providing a humidity control means, providing a temperature control means and accommodating the at least one circuit, the humidity control means and the temperature control means in the container.

The invention will further be explained below with reference to the accompanying drawings, in which:

Figure 1 schematically shows, in cross-sectional view, a first embodiment of a device according to the present invention.

Figure 2 schematically shows, in perspective, a second embodiment of a device according to the present invention.

The device 1 shown merely by way of non-limiting example in Fig. 1 comprises a flexible container 3 which is in the form of an envelope, enclosing a space 2. The walls of the container 3 are shown to consist of two layers, an outer insulating layer 8 and an inner moisture barrier layer 9. The insulating layer 8 is preferably made of polyethylene or polyurethane, while the moisture barrier layer 9 is preferably made of aluminium. These layers may form a laminate of the kind used in Raychem's TDUX™ products, as disclosed in EP 0 579 641 and other patents. When properly sealed, such a laminate has an extremely low water vapour transmission rate (WVTR).

The access opening 11 of the container 3 is sealed by sealing strips 13 which enclose optical fibres 12. An optical circuit 10 and a humidity control means 4

(preferably a desiccant) are accommodated in the space 2.

In accordance with the present invention the device is provided with at least one temperature control unit. In the embodiment shown, a first temperature control unit 5 is accommodated in the space 2 defined by the container 3 and a second temperature control unit 6 is accommodated in a cavity provided in a container wall 7.

Although two temperature control units 5, 6 are shown in Fig. 1, it is preferred that only a single temperature control unit is present in a device 1.

The temperature control units 5, 6 may be active or passive and may comprise a heat sink, a heat pipe, a Peltier element or other suitable heat control elements. In the case of active elements, electrical leads (not shown) are passed through the opening 11 and sealed by the sealing strips 13.

The embodiment of Fig. 2 is particularly suitable for small optical circuits consisting of only one or two components. In Fig. 2A, a single optical component 10 is enclosed by a relatively rigid container 3' which is preferably constituted by a metal sleeve. The strips 13, which are preferably made of a polymer, are bent in a ring-shape so as to seal both ends (openings 11) of the container 3'. A humidity and/or temperature control unit 4, 5 is approximately tubularly shaped so as to fit around the optical component 10. Optical fibres 12 are connected to the optical component 10. When the device 1 is assembled, the strips 13 are located near the ends of the container 3', as shown in Fig. 2B. Then heat is applied to the end regions, as shown in Fig. 2C, to seal the device 1. To this end, suitable heat-generating dies 15 are used which are pressed together to effect the seal.

It will be understood by those skilled in the art that the present invention is not limited to the embodiments shown and that many additions and modifications are possible without departing from the scope of the present invention as defined in the appending claims.

Claims

1. Device (1) for sealingly enclosing at least one optical circuit (10), the device comprising a container (3) and a humidity control means (4) accommodated in the container (3),
5 **characterised by** temperature control means (5, 6) arranged in the container (3).
2. Device according to claim 1, wherein the container (3) is substantially flexible.
- 10 3. Device according to claim 1, wherein the container (3) is substantially rigid.
4. Device according to claim 1, 2 or 3, wherein the temperature control means (5) are accommodated in a wall (7) of the container (3).
- 15 5. Device according to any of the preceding claims, wherein the temperature control means (6) are accommodated in a space (2) defined by the container (3).
6. Device according to claim 5, wherein the temperature control means (6) are accommodated between the at least one optical component (1) and a humidity
20 control means (4).
7. Device according to any of the preceding claims, wherein the temperature control means (5, 6) comprise an active temperature controller.
- 25 8. Device according to any of the preceding claims, wherein the temperature control means (5, 6) comprise a heat sink.
9. Device according to any of the preceding claims, wherein the container (3) comprises a heat insulating layer (8) and a moisture barrier layer (9).
- 30 10. Device according to any of the preceding claims, having an opening (11) for feeding optical fibres (12) therethrough, said opening being sealed by sealing strips

(13) to which heat and/or pressure is applied, said sealing strips preferably being made of plastic.

11. Device according to any of the preceding claims, wherein at least one optical
5 circuit (10) is accommodated, said circuit preferably comprising active and/or passive optical components.

12. Device according to any of the preceding claims, wherein the at least one optical
10 circuit (10) consists of a single optical component.

13. Kit-of-parts for forming a device (1) according to any of the preceding claims.

14. Method of sealingly enclosing at least one optical circuit (10), the method
comprising the steps of:

- 15
- providing a container (3);
 - providing a humidity control means (4);
 - providing a temperature control means (5, 6); and
 - accommodating the at least one circuit (10), the humidity control means (4)
and the temperature control means (5, 6) in the container.

20 15. Method according to claim 14, wherein the temperature control means (5, 6) is pre-installed in the container (3).

25 16. Method according to claim 14 or 15, wherein the temperature control means (5, 6) comprises a heat sink.

17. Method according to claim 14, 15 or 16, wherein the container is substantially flexible.

* * * * *

BEST AVAILABLE COPY

ABSTRACT


A device (1) for sealingly enclosing at least one optical circuit (10), the device comprising a container (3) and a humidity control means (4) accommodated in the container (3). The
5 device is characterised by temperature control means (5, 6) arranged in the container (3).
The container (3) is preferably flexible.

[Fig. 1]

BEST AVAILABLE COPY

B417

1/2

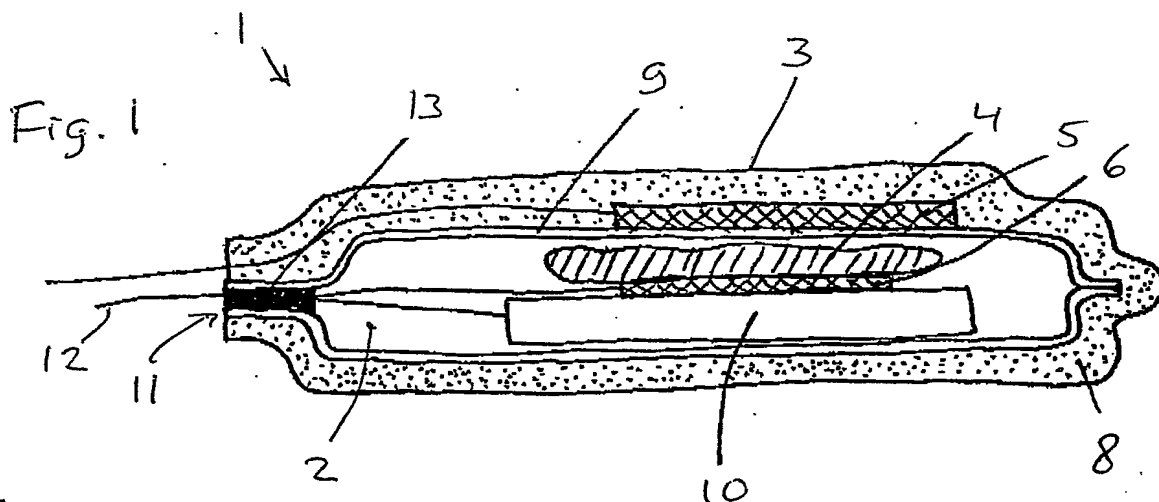

BEST AVAILABLE COPY

BEST AVAILABLE COPY

BEST AVAILABLE COPY

Fig. 2A

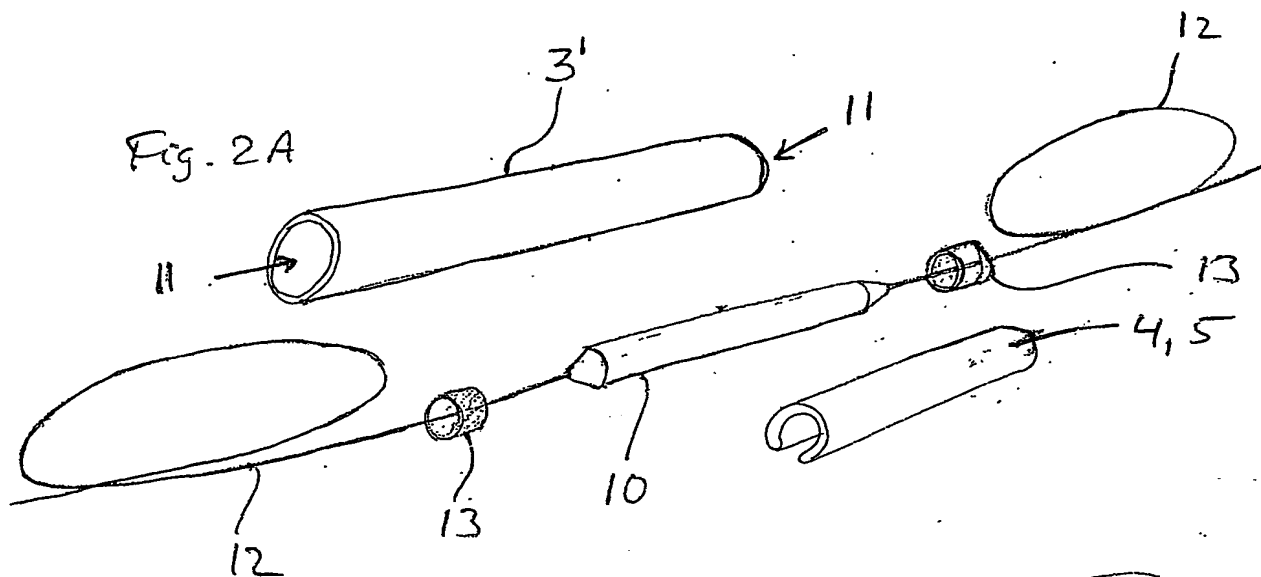


Fig. 2B


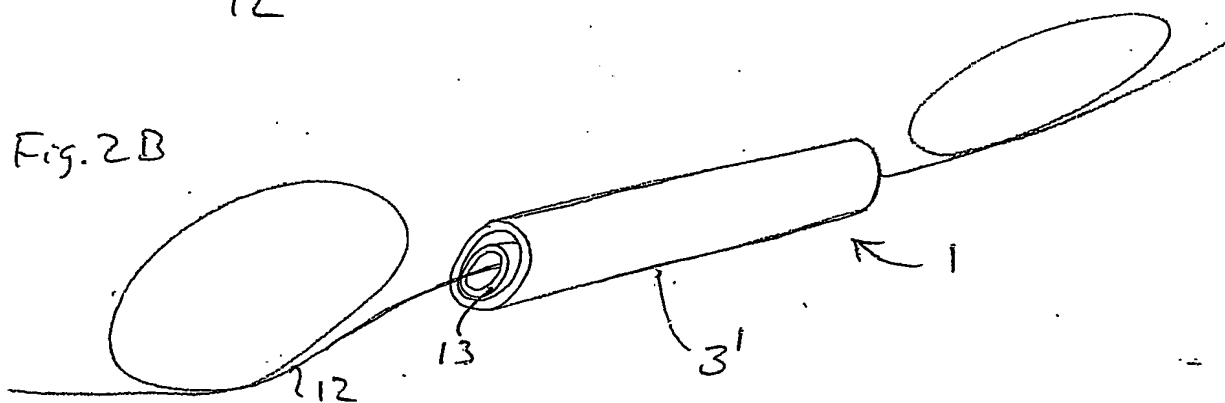


Fig. 2C

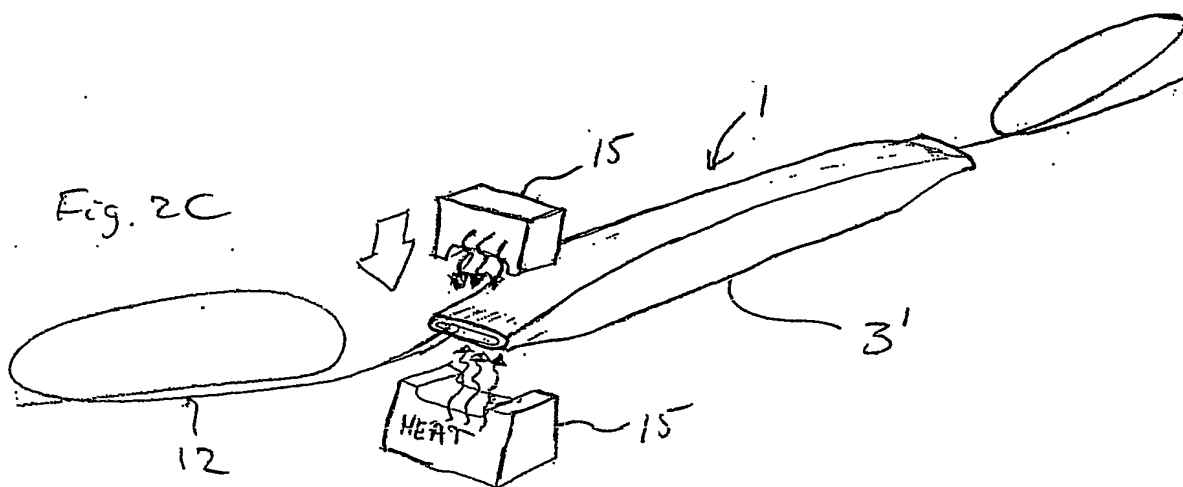

BEST AVAILABLE COPY